

Minimise Your Waste Maximise Your Savings

CP30 Rolonof Portable Waste Compactor

Specification

Our CP30 portable compactors are suitable for general and food waste, where environmental and hygiene requirements demand a sealed unit or where space is at a premium. With leak resistant seals, fast cycle time, high volume charge box, our portable waste compactors are the perfect choice to minimise your waste costs.



Available in a range of colours, with clear operating instructions and health and safety stickers as standard. Easy to operate, safe to use and backed by a network of our own engineers to ensure maximum reliability.

Technical Information

Compaction Force	28 Tonnes
Power Requirement	32A 3Ph + N + E Socket outlet fused at 32Amp D type with local 30 Milliamp RCD protection (If you have an existing supply that doesn't match this specification, please contact technical@capitalcompactors.co.uk to check if it's usable or discuss a solution)
Motor	7.5kW
Noise Level	67dB at 3m From Unit
Cycle Time	41 Seconds
Charge Box Volume	1900mm x 1100mm (2.2m ³)
Volume Per Stroke	1.3m ³
Ram Depth	600mm
Ram Diameter	2 x 110mm
Running Hydraulic Pressure	2000psi
Overall Length	6811mm
Overall Width	2360mm
Overall Height	2523mm
Variant Shown	Enclosed Hopper

The details provided in our specification sheets are for your general information and use only. They are subject to change due to the continual design and build development.

Capital Compactors

Capital House, 26 Sudley Road, Bognor Regis, West Sussex PO21 1ER call +44 (0)1243 837614 fax +44 (0)1243 837615 email enquiries@capitalcompactors.co.uk












Minimise Your Waste Maximise Your Savings

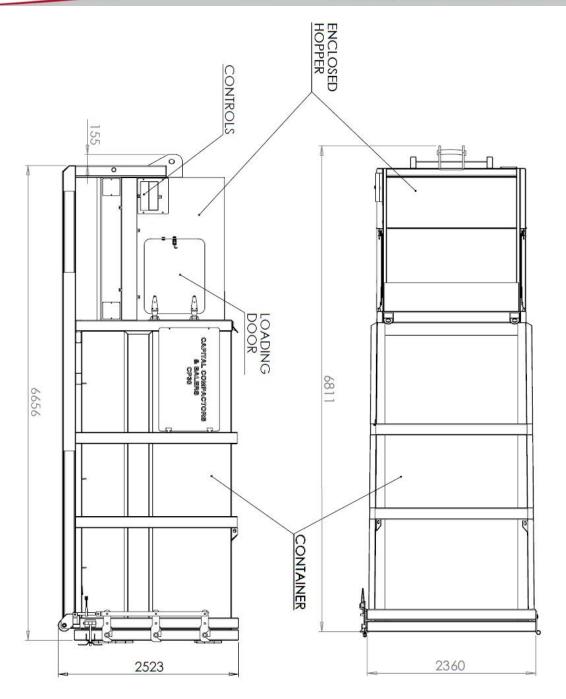

SIDE VIEW

PLAN VIEW