



CAPITAL COMPACTORS & BALERS

Minimise Your Waste **Maximise Your Savings**

CP10 Skip Portable Waste Compactor

Specification

Our CP10 portable compactors are suitable for general waste, where environmental and hygiene requirements demand a sealed unit or where space is at a premium.

With leak resistant seals, fast cycle time, high volume

charge box, our portable waste compactors are the perfect choice to minimise your waste costs.

Available in a range of colours, with clear operating instructions and health and safety stickers as standard. Easy to operate, safe to use and backed by a network of our own engineers to ensure maximum reliability.



Technical Information

Compaction Force	20 Tonnes
Power Requirement	32A 3Ph + N + E Socket outlet fused at 32Amp D type with local 30 Milliamp RCD protection (If you have an existing supply that doesn't match this specification, please contact technical@capitalcompactors.co.uk to check if it's usable or discuss a solution)
Motor	5.5kW
Noise Level	67dB at 3m From Unit
Cycle Time	44 Seconds
Charge Box Volume	1490mm x 800mm (1.6m ³)
Volume Per Stroke	1.0m ³
Ram Depth	530mm
Ram Diameter	2 x 90mm
Running Hydraulic Pressure	2000psi
Overall Length	4760mm
Overall Width	1880mm
Main Frame Height	2104mm (or 2867mm with lid open)
Variant Shown	Hydraulic Lid

The details provided in our specification sheets are for your general information and use only. They are subject to change due to the continual design and build development.

Capital Compactors

Capital House, 26 Sudley Road,
Bognor Regis, West Sussex
PO21 1ER

call +44 (0)1243 837614

fax +44 (0)1243 837615

email enquiries@capitalcompactors.co.uk

www.capitalcompactors.co.uk




© Capital Compactors Ltd 2017 | All rights reserved
* Indicates a trademark registered in the UK



CAPITAL COMPACTORS & BALERS

Minimise Your Waste **Maximise Your Savings**

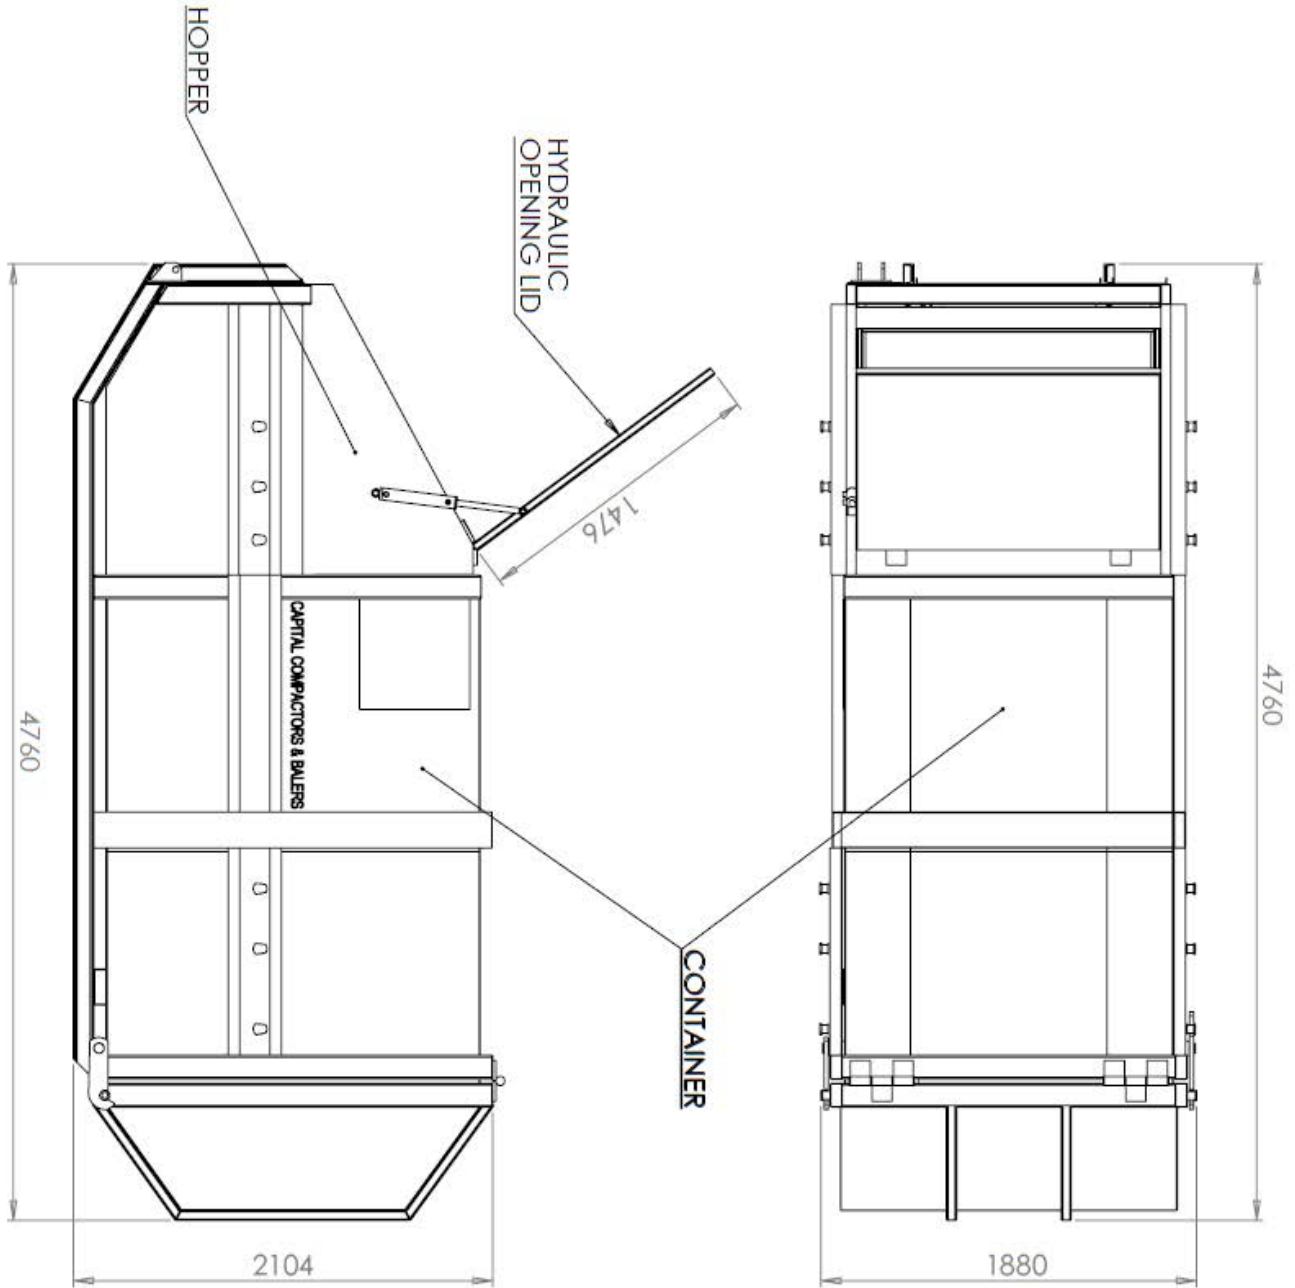

SIDE VIEW

PLAN VIEW